


# FRG-700 Full Range Pirani/Inverted Magnetron Gauge



The Varian FRG-700 is a full range gauge that provides two measuring technologies in a single, compact and economical package to measure process and base pressure from  $5 \times 10^{-9}$  mbar to atmosphere ( $3.8 \times 10^{-9}$  Torr to atmosphere). The single, compact unit with one logarithmic analog output signal significantly reduces the complexity of installation, setup and integration. The benefit is reduced cost and reduction in valuable space requirements.



**FRG-700 Controller** – Compatible with FRG-700, the FRG-700 Single Gauge Controller has a wide pressure range, from 10<sup>-10</sup> to 1500 mbar (10<sup>-10</sup> to 1125 Torr), adjustable set-point, and a menu-driven user interface that provides flexible vacuum control.

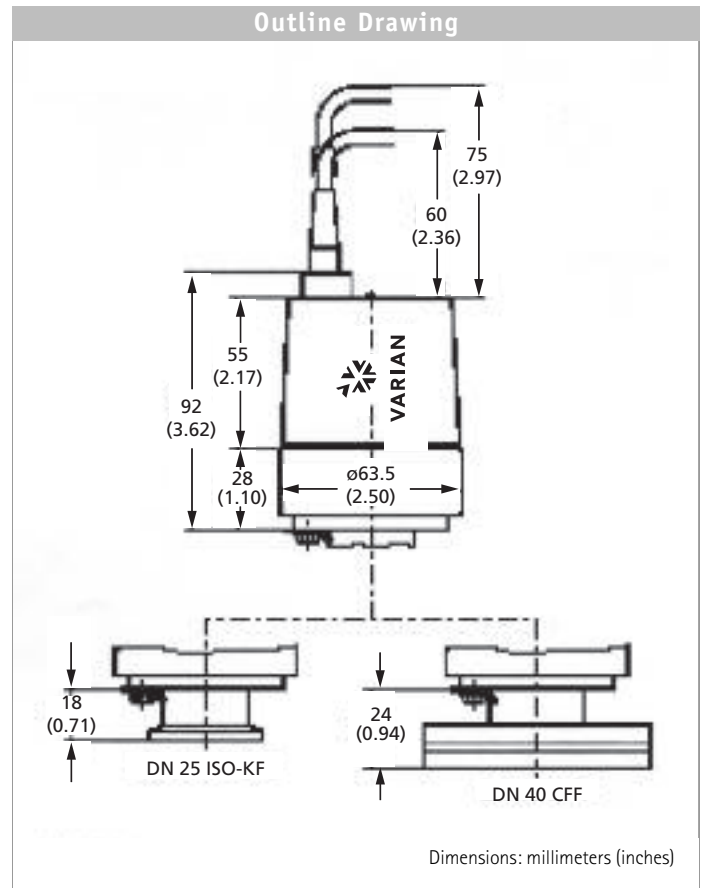

## Applications

- High vacuum pressure monitoring
- Base pressure for evaporation and sputtering systems
- General vacuum measurement and control in the medium and high vacuum range

## Features

Combination gauge – inverted magnetron and Pirani, with wide measurement range from  $5 \times 10^{-9}$  mbar to atmosphere  
 No filament to burn out; easy to clean  
 Excellent ignition properties  
 Can be operated by a Varian V-81 or V-301 rack controller  
 LED indicator for high voltage on

## Benefits

Measures 9 decades using 1 compact gauge, 1 connection, 1 sensor cable and 1 A/D converter; reduces complexity and cost  
 Low maintenance and reduced cost  
 Rapid start-up  
 Greatly reduces cost and space requirements  
 Provides quick visual indication of status

# FRG-700 – Full Range Gauge

Technical Specifications				
Measurement range	5 x 10 <sup>-9</sup> to 1000 mbar (3.8 x 10 <sup>-9</sup> to 760 Torr)			
Accuracy	± 30 % of reading, typical			
Repeatability	± 5 % of reading, typical			
Mounting orientation	Any			
Admissible temperature	Operation (ambient)	Storage	Bake-out *	Filament temperature (Pirani)
	5 to 55 °C	-40 to +65 °C	150 °C	120 °C
Supply voltage	At gauge	Ripple		Power consumption
	15 to 30 VDC	≤1 V <sub>pp</sub>		≤2 W
Output signal (measurement signal)	Voltage range		Measurement range	
	0 to 10.5 V		1.82 to 8.6 V	
Voltage vs. pressure	0.6 V/decade, logarithmic			
Error signal	<0.5 V (no supply), >9.5 V (Pirani sensor, filament rupture)			
Minimum loaded impedance	10 kΩ, short-circuit proof			
Response time	<10 ms (@ p > 10 <sup>-6</sup> mbar), ≈ 1000 ms (@ p = 10 <sup>-8</sup> mbar)			
Identification gauge	85 kΩ, referenced to supply common			
Status	Pirani-only mode	Combined Pirani/cold cathode mode		LED
	0 V (low)	15 V to 30 (high)		LED green high voltage on
Electrical connection	FCC 68 appliance connector, 8 poles, female			
Sensor cable	8 poles plus shielding			
Maximum cable length	≤ 50 m			
Operating voltage/current	≤3.3 kV/≤500 A			
Materials exposed to vacuum	SS, Al <sub>2</sub> O <sub>3</sub> , FPM75, Mo, Ni, Au, W			
Internal volume	≈ 20 cm <sup>3</sup>			
Weight	DN 25 ISO-KF ≈700g, DN 40 CF ≈980g			
Standards	EN 61000-6-2, EN 61000-6-3, EN 61010-1			

\*Without electronics and magnetic shielding.

## Ordering Information

Description	Part Number
FRG-700 Full Range Gauge Pirani/IMG, KF 25	FRG700KF25
FRG-700 Full Range Gauge Pirani/IMG, 2.75" CF	FRG700CF35
FRG-700 Single Gauge Controller, 1 channel	FRG700CNTR1
<b>Accessories</b>	
FRG-700 Adapter for Controller	FRG700ADPT
FRG-700 Full Range Gauge Maintenance Kit	FRG700MAINT
FRG-700 Full Range Gauge Repair Kit	FRG700REPR
FRG-700 Cable, Gauge to FRG Controller, 3M	FRG700CBL3
FRG-700 Cable, Gauge to FRG Controller, 5M	FRG700CBL5
FRG-700 Cable, Gauge to AG Turbo Controller, 3M	TBD

WWW.VARIANINC.COM/VACUUM

**United States**  
 Varian Inc., Vacuum Technologies  
 121 Hartwell Avenue  
 Lexington, MA 02421 USA  
 Tel: (781) 861 7200  
 Fax: (781) 860 5437  
 Toll Free 1 (800) 882 7426

**Europe**  
 Varian Inc., Vacuum Technologies  
 Via F.lli Varian 54  
 10040 Leini, (Torino) Italy  
 Tel: (39) 011 997 9 111  
 Fax: (39) 011 997 9 350  
 Toll Free 00 800 234 234 00

